


Quick Installation Guide

3G Mobile Wi-Fi

MODEL NO. M5350

Package Contents

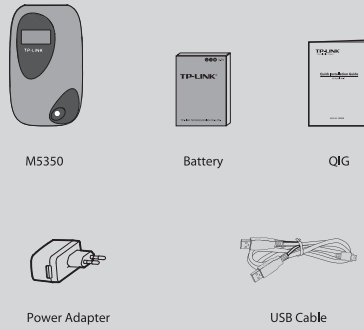

System Requirement



The following operating systems are supported:

- Windows 8
- Windows 7
- Windows Vista
- Windows XP
- Mac
- iOS
- Android

The following browsers are supported:

- Microsoft Internet Explorer
- Firefox
- Safari
- Chrome

Physical Description

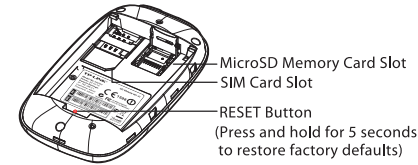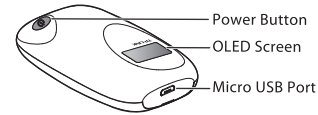

OLED Screen details:



When you leave alone the buttons on the device, the OLED screen will light on for 55 seconds and then turn off. Later when you press the power button, the OLED screen will light up and display the related information.

OLED Indication:


Item	Indication
(Signal strength)	Indicates the signal strength of current 2G/3G network.
2G/3G (Network option)	Displays the current network option: 2G or 3G.
WiFi (Wi-Fi connection)	Displays the Wi-Fi status and the amount of current wireless clients.
SMS (SMS)	Indicates that there is un-read short message(s); if the icon flashes, it means the mail-box is full.
(Connection status)	Indicates the successful network connection.
(Battery)	Displays the remaining battery power.
(Connection mode)	A Means the automatic mode of Internet connection. M Means the manual mode of Internet connection.
52B /125KB (Traffic statistics)	Means "current traffic/total traffic".

Warning:


1. We recommend you to use only the power adapter provided with the device.
2. Place the device on the level and stable surface.
3. Unplug the power adapter during the thunder storm to avoid damage.
4. Place the device in a well ventilated place far from any heater or heating vent.
5. Keep the device far from the water to avoid damage.

1 Hardware Installation

STEP 1: Install SIM card and memory card.




Open the cover upwards (as the arrow shows).



Make sure to have the SIM card's metal chip downwards and the triangle notch upwards, and then slide the card into its slot. (In the direction as the arrow shows)


Note If you have a Micro-SIM or Nano-SIM, please use an adapter to convert it to a SIM card.



First, push and then lift the locker to open it. **Second**, have the memory card's metal chip downwards and inwards, and then fit it in its slot; **Finally**, put down and then pull the locker to lock it.

Note The microSD memory card is optional. You can purchase it up to your own need.

STEP 2: Install battery.




Touch the metal contacts of the battery to the metal points of the device, and then press to fit the battery body into the slot.



Before closing the cover, please note down the **SSID** and the **Wireless Password** on the label for later use.

* SSID: The wireless network name of M5350
* Wireless Password: The pre-encryption of M5350



Close the cover by pressing it.




It's advised that you do not use M5350 until the battery has been installed.

When finishing the above two-step installation, you can press the power button for about 5 seconds to turn on M5350.

2 Wireless Connection to M5350

(Here we take that in Windows 7 for example.)

- 1 Click the icon at the bottom of your desktop.



- 2 Click refresh button , select the SSID of M5350 and then click **Connect**.




- 3 Enter the wireless password you've noted down in the Security key field, and then click **OK**.



Please refer to the label on the rear cover for the default SSID and wireless password of M5350.


- 4 When **Connected** appears behind the SSID of M5350, you've successfully connected to its wireless network.

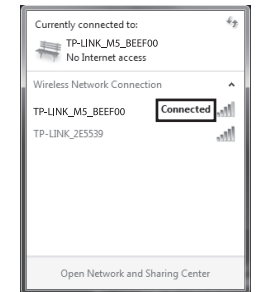


After successful connection to M5350 (with a SIM card inserted), you can enjoy the 3G mobile connection instantaneously. Otherwise, please continue with **3 Configuration of M5350** to further configure your device.

3 Configuration of M5350


1 Open a Web browser, type <http://192.168.0.1> in the address field, and press **Enter**. At the prompt, enter the default user name and password: **admin**. Click **OK** to log in.




2 **Quick Setup** page will appear after successful login. Click **Next** to continue.

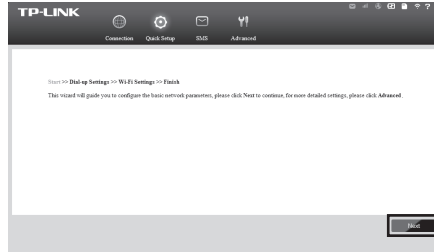


3 **Dial-up Settings** page will display the ISP information of the inserted SIM card. Confirm it and then click **Next** to continue.

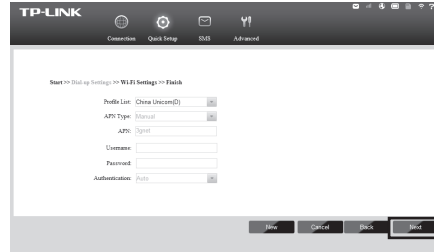

4 Create a unique and easy-to-remember **SSID** as well as **Wireless Password** for your wireless network, or you can keep it default. Then click **Next** to continue.

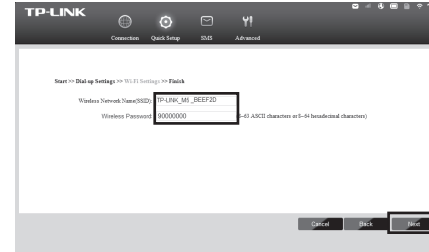

5 Double-check your settings. If all the parameters are verified, click **Finish** to complete the Quick Setup. If there is anything wrong, you can click **Back** to re-configure it.

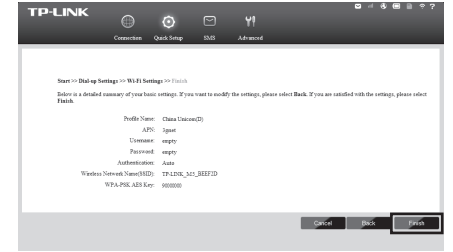

Note If the ISP information of your inserted SIM card is not verified, please click **New** to create a new profile with correct ISP information.

Troubleshooting

T1. What should I do if I cannot log in the web-based management page of M5350 after I have successfully connected to M5350?

- 1) Please verify your PC's IP address is on the same network segment with M5350. If not, please go to the next step.
- 2) Manually set an IP address for your PC, or configure your PC to "Obtain an IP address automatically" and "Obtain DNS server address automatically". Thus to make sure your PC's IP address on the same network segment with M5350.
- 3) If the above two steps failed, please feel free to contact our technical support.

T2. What should I do if I cannot access the Internet?

- 1) Please verify the card you inserted into M5350 is a valid WCDMA SIM card.
- 2) Please check if the PIN function is enabled. If enabled, please go to "Advanced-> Dial-up -> PIN Config" and enter the correct PIN code.
- 3) Please verify the current ISP parameters are correct. Otherwise, please go to "Advanced -> Dial-up -> Profile" and configure the correct parameters.
- 4) Please check if the connection mode is auto or manual. If it is manual connection, please go to "Advanced-> Dial-up" and click "Connect" to manually get connected to the Internet.
- 5) If the above steps failed, please feel free to contact our technical support.

T3. What if I forget my login password?

- 1) Restore M5350 to its factory defaults;
- 2) Log into M5350 with the default user name and password: admin; then reconfigure M5350 following this QIG.

T4. How could I restore M5350 to its factory defaults?

Method 1: With M5350 powered on, use a pin to press the RESET button in the interior panel.


Method 2: Get logged in to the web-based management page of M5350, and then go to "Advanced-> Tools -> Restore Factory" and click "Restore".

Note Once M5350 is reset, all the current configurations will be lost and you need to reconfigure it.

How to charge the battery?


Method 1:

- 1) Connect one end of the USB cable to the micro USB port.
- 2) Connect the other end of the USB cable to the USB port of the power adapter.
- 3) Plug the power adapter to a standard wall socket.

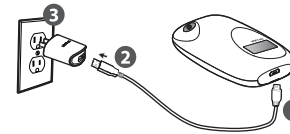

Method 2:

- 1) Connect one end of the USB cable to the micro USB port.
- 2) Connect the other end of the USB cable to the USB port of your PC.

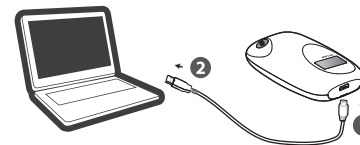

Technical Support

- For more troubleshooting help, go to www.tp-link.com/en/support/faq
- To download the latest Firmware, Driver, Utility and User Guide, go to <http://www.tp-link.com/en/support/download/>
- For all other technical support, please contact us by using the following details:

<p>Global Tel: +86 755 2650 4400 E-mail: support@tp-link.com Service time: 24hrs, 7 days a week</p> <p>Singapore Tel: +65 6284 0493 E-mail: support.sg@tp-link.com Service time: 24hrs, 7 days a week</p> <p>UK Tel: +44 (0) 845 147 0017 E-mail: support.uk@tp-link.com Service time: 24hrs, 7 days a week</p> <p>Ukraine Tel: 0 800 505 508 E-mail: support.ua@tp-link.com Service time: Monday to Friday 10:00 to 22:00</p> <p>Brazil Toll Free: 0800 608 9799 (Portuguese Service) E-mail: support.br@tp-link.com Service time: Monday to Friday, 9:00 to 20:00; Saturday, 9:00 to 15:00</p> <p>Italy Tel: +39 023 051 9020 E-mail: support.it@tp-link.com Service time: Monday to Friday, 09:00 to 13:00; 14:00 to 18:00</p> <p>Indonesia Tel: +62 2021 6386 1936 E-mail: support.id@tp-link.com Service time: Monday to Friday 9:00 to 18:00 (Except public holidays)</p> <p>Germany / Austria Tel: +49 1805 875465 (German Service) +49 1805 TP LINK +43 820 820360 E-mail: support.de@tp-link.com Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42 EUR/min from mobile phone. Service Time: Monday to Friday, 9:00 to 12:30 and 13:30 to 17:30, GMT+1 or GMT+2 (Daylight Saving Time in Germany) * Except bank holidays in Hesse</p>	<p>Australia / New Zealand Tel: AU 1 300 87 5465 NZ 0800 87 5465 E-mail: support.au@tp-link.com (AU) support.nz@tp-link.com (NZ) Service time: 24hrs, 7 days a week</p> <p>Turkey Tel: 444 1925 (Turkish Service) E-mail: support.tr@tp-link.com Service time: 9:00 to 21:00, 7days a week</p> <p>USA / Canada Toll Free: +1 866 225 8139 E-mail: support.usa@tp-link.com Service time: 24hrs, 7days a week</p> <p>Malaysia Tel: 1 300 88 875 465 (1300 88TP-LINK) E-mail: support.my@tp-link.com Service time: 24hrs, 7days a week</p> <p>Poland Tel: +48 (0) 801 080 618 / +48 227 217 563 (if calls from mobile phone) E-mail: support.pl@tp-link.com Service time: Monday to Friday 9:00 to 17:00, GMT+1 or GMT+2 (Daylight Saving Time)</p> <p>Switzerland Tel: +41 (0) 848 800 998 (German Service) E-mail: support.ch@tp-link.com Fee: 4-8 Rp/min, depending on rate of different time Service time: Monday to Friday, 09:00 to 12:30 and 13:30 to 17:30, GMT+1 or GMT+2 (Daylight Saving Time)</p> <p>France Tel: +33 (0) 820 800 860 (French service) E-mail: support.fr@tp-link.com Fee: 0.118 EUR/min from France Service time: Monday to Friday, 9:00 to 18:00 (Except French Bank holidays)</p> <p>Russian Federation Tel: 8 (499) 754 5560 / 8 (800) 250 5560 (toll-free call from any RF region) E-mail: support.ru@tp-link.com Service time: From 10:00 to 18:00 (Moscow time) *Except weekends and holidays in Russian Federation</p>
---	---